

## CT524-328-2ac-1n-1gf LANforge WiFIRE 802.11a/b/g/n/ac 3 radio WiFi Traffic Generator Supporting 328 Virtual STA Interfaces

The CT524-328-2ac-1n-1gf wireless traffic generator is an excellent choice for testing Access Points and other WiFi networks. The CT524-328-2ac-1n-1gf uses a modified Wireless driver for WiFi NICs based on the Qualcomm/Atheros chipset. The ath9k (a/b/g/n) chipset NICs can support up to 200 stations per radio. The ath10k (a/b/g/n/ac) chipset NICs can support up to 64 stations per radio. Each of the Virtual Stations has its own IP address, IP port space, MAC address and routing table. The Virtual Stations can be assigned to communicate to a particular Access Point, use a particular SSID, and Open or WPA/WPA2 authentication assigned. More advanced 802.1X authentication is also included. Each radio can be configured independently of the other. Transmit power and channel/frequency is configured on a per-radio basis. Most other settings are configurable per virtual station.

**There are two ath10k a/b/g/n/ac and one ath9k a/b/g/n WiFi radios per CT524-328-2ac-1n-1gf and multiple LANforge systems can be clustered together for even more realistic radio interference patterns and increased traffic generation capability.**

All virtual stations on the same radio must be on the same frequency, but as long as the protocol supports that frequency, the multiple protocols can be used concurrently. For instance, if the radio is configured for a 2.4Ghz channel, the stations can be /b, /g, /n, or /ac. If the radio is on a 5Ghz channel, the stations can be /a, /n or /ac. The bandwidth can be configured for all protocols. For 802.11n and 802.11AC, configuring the MCS rates also determines the number of spatial streams (1x1, 2x2, 3x3, 4x4, etc.).

The Virtual Stations may be configured with all of the virtual interfaces on the same subnet, or different subnets, depending on the testing requirements. When used with something like VoIP, it allows all of the VoIP calls to use the standard IP ports (with one call per virtual interface).

The CT524-328-2ac-1n-1gf has quiet fans and is relatively small. It has 9 antenna. No additional hardware or software is required, but it is suggested that you manage the system using the LANforge GUI on a separate machine. The CT524-328-2ac-1n-1gf can also be managed over a serial console in text mode or through a directly connected monitor, mouse and keyboard.



Larger Images: [front](#) [back/open](#)

NOTE: This product may have a different hardware configuration than the system pictured above.  
Refer to your official quote for details.

---

*Candela Technologies Inc., 2417 Main Street, Suite 201, P.O. Box 3285, Ferndale, WA 98248, USA  
[www.candelatech.com](http://www.candelatech.com) | [sales@candelatech.com](mailto:sales@candelatech.com) | +1 360 380 1618*

## Example Network Diagram




## LANforge WiFIRE Virtual Station Traffic Generator

LANforge WiFIRE supports 802.11 Virtual Stations and Access Points\*. To the System Under Test, it appears as if there are multiple PCs sitting inside the LANforge system generating independent traffic streams over Wireless NICs.

Many Virtual Station interfaces are supported per LANforge WiFIRE machine. LANforge can send traffic from one physical interface on the local machine to another interface on that same machine. Each physical and virtual interface can be configured on the same, or on different IP subnets.

In the configuration on the left, the LANforge FIRE Core can be one physical Ethernet interface and act as the server. The LANforge FIRE Edge can be the Virtual Station interfaces configured on the WiFi radio. Both interfaces can be on the same machine or multiple LANforge machines can be clustered together for increased traffic generation capacity.

\* All system support 802.11 a/b/g/n.  
Some systems support 802.11ac as well.

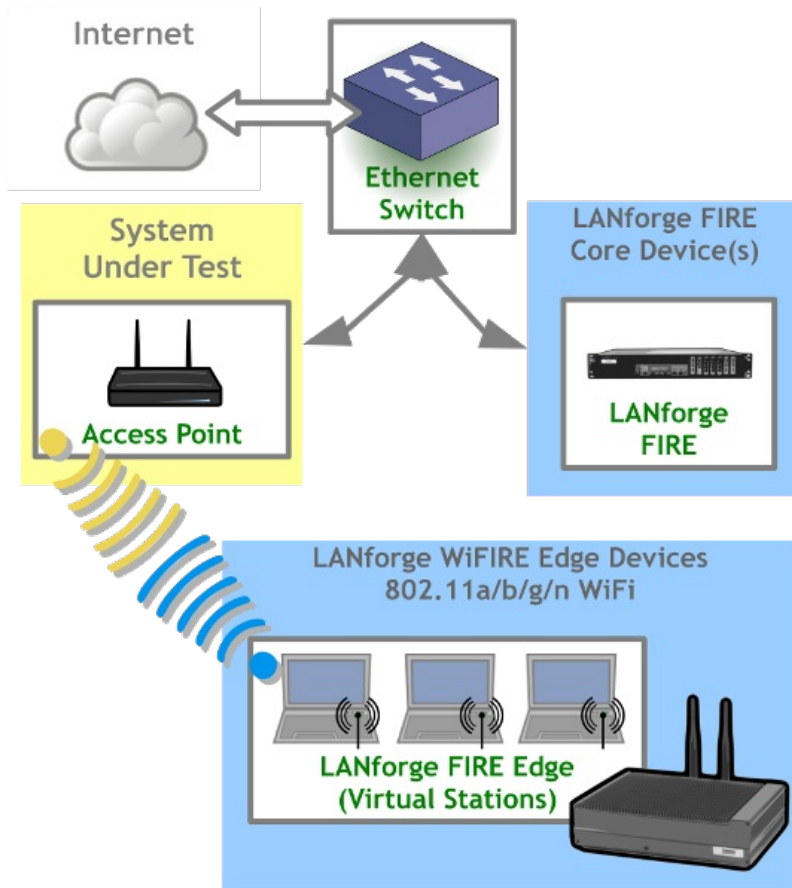

Candela Technologies Inc., 2417 Main Street, Suite 201, P.O. Box 3285, Ferndale, WA 98248, USA  
www.candelatech.com | sales@candelatech.com | +1 360 380 1618

## Quick Start Guide

1. Connect Management Ethernet port to Management network or management PC. If connecting directly to a PC, an Ethernet cross-over cable should be used.
2. Connect eth1 wired Ethernet interface to wired Ethernet interface on the AP or network under test. This usually is considered the 'server' side of the network.

3. The Client side of the network will be the Virtual Stations configured on the CT524-328-2ac-1n-1gf WiFi NIC(s).
4. Connect power to standard US or European AC power source. If using external battery pack, then connect to that instead.
5. Install the LANforge-GUI on a separate management PC or Laptop. Windows and Linux GUIs are supported: Select the correct one from the CDRom or Candela Technologies Download page and install it. The CT524-328-2ac-1n-1gf appliance has a web server that also provides the LANforge GUIs.
6. The CT524-328-2ac-1n-1gf should now boot. If DHCP is enabled on the Management network, the CT524-328-2ac-1n-1gf will automatically acquire an IP address. If DHCP is not available, the IP address will be set to **192.168.1.101** by the LANforge scripts.
7. Start the LANforge-GUI on the management PC and click the 'Discover' button. It should find the CT524-328-2ac-1n-1gf appliance and add the IP address to the drop-down box in the Connect widget. Press 'Connect' and you will be connected to the CT524-328-2ac-1n-1gf.
8. Select the Port Mgr tab in the GUI. Double-click on the device called 'wiphy0'. This is the Radio device, and should be configured for the correct, channel, country-code, etc. Next, select one or more of the Virtual Station interfaces and click 'Modify'. Enter the correct IP address information, SSID and WPA/WPA2 password (if Enabled). After applying these changes, the Virtual Station interface should associate with the AP and be ready to send traffic. You may create up to 328 Virtual Station interfaces per CT524-328-2ac-1n-1gf with the 'Create' button.
9. Once the interfaces are configured correctly, you can click on the Layer 3, VOIP/RTP and other LANforge-FIRE related GUI tabs and configure/modify/start/stop particular traffic patterns that utilize the virtual stations and wired Ethernet interface. In most cases, you will want one of the FIRE endpoints to be on the wired interface and the other to be on the WiFi Virtual Station interface. It is also valid to generate traffic between two Virtual Station interfaces. The GUI Plugins menu (and right-click on some tables) provides some plugins to do automated testing and reporting. Contact support if you have suggestions for improvements.
10. Any GUI modifications take place immediately after you click 'Submit'.

---

*Candela Technologies Inc., 2417 Main Street, Suite 201, P.O. Box 3285, Ferndale, WA 98248, USA  
www.candelatech.com | sales@candelatech.com | +1 360 380 1618*

## LANforge WiFIRE Related Images

### Virtual Station Configuration Screen

sta1 (brent-521) Configure Settings

Port Status Information

Current: LINK-DOWN GRO NONE

Driver Info: Port Type: WIFI-STA Parent: wiphy0

Port Configurables

Standard Configuration

Advanced Configuration

Misc Configuration

Custom WiFi

Enable

☐ Set IF Down
 ☐ Set MAC
 ☐ Set TX Q Len
 ☐ Set MTU
 ☐ Set Offload
 ☐ Set PROMISC

Services

☐ HTTP
 ☐ FTP
 ☐ RADIUS

Low Level

☐ PROMISC
 ☐ TSO Enabled
 ☐ UFO Enabled
 ☐ GSO Enabled
 ☐ LRO Enabled
 ☒ GRO Enabled

General Interface Settings

☐ Down
 ☐ Aux-Mgt
 ☐ DHCP-IPv6
 ☒ DHCP Release
 DHCP Vendor ID: None
 ☐ DHCP-IPv4
 Secondary-IPs
 DHCP Client ID: None
 DNS Servers: BLANK
 Peer IP: NA
 IP Address: 0.0.0.0
 Global IPv6: AUTO
 IP Mask: 0.0.0.0
 Link IPv6: AUTO
 Gateway IP: 0.0.0.0
 IPv6 GW: AUTO
 Alias:
 MTU: 1500
 MAC Addr: 00:0e:8e:6f:81:f8
 TX Q Len: 1000
 Rpt Timer: medium (8 s)
 WiFi Bridge: NONE

WiFi Settings

SSID: brenttest-523
 AP: DEFAULT
 Key/Phrase: mypasswd
 Mode: 8 (8)
 Freq/Channel: 2437/6
 Rate: OS Default
 ☐ WPA
 ☒ WPA2
 ☐ OSEN
 ☐ WEP
 ☐ Disable HT40
 ☐ Disable SGI

Print

View Details

Probe

Display Scan

Sync

Apply

OK

Cancel

Candela Technologies Inc., 2417 Main Street, Suite 201, P.O. Box 3285, Ferndale, WA 98248, USA  
[www.candelatech.com](http://www.candelatech.com) | [sales@candelatech.com](mailto:sales@candelatech.com) | +1 360 380 1618

## Layer 3 (Ethernet, UDP, TCP) Connections



LANforge Manager Version(5.2.13)

Control Reporting Tear-Off Info Plugins

Stop All Restart Manager Refresh HELP

Attenuators File-IO Layer-4 Test Mgr Test Group Resource Mgr Event Log Alerts Port Mgr Messages

Status Layer-3 L3 Endps WanLinks

Rpt Timer: fast (1 s) Go Test Manager all Select All Start Stop Quiesce Clear

View 0 - 200 Display Create Modify Delete

Cross Connects for Selected Test Manager

Name	Type	State	Pkt Rx A → B	Pkt Rx A ← B	Rate A → B	Rate A ← B	Rx Drop % A	Rx Drop % B	Drop Pkts A	Drop Pkts B	Avg RTT
xcdx-1	LF/UDP	Run	17,294	17,549	9,998,239	9,997,437	0	0	0	0	1
xcdx-10	LF/UDP	Run	17,377	17,716	9,997,632	9,996,340	0	0	0	0	0
xcdx-2	LF/UDP	Run	17,548	17,802	9,997,351	9,996,964	0	0	0	0	0
xcdx-3	LF/UDP	Run	17,633	17,802	9,997,891	9,996,964	0	0	0	0	0
xcdx-4	LF/UDP	Run	17,633	17,802	9,997,891	9,996,964	0	0	0	0	1
xcdx-5	LF/UDP	Run	17,718	17,036	9,997,947	9,992,326	0	0	0	0	1
xcdx-6	LF/UDP	Run	17,718	17,044	9,997,947	9,997,018	0	0	0	0	1
xcdx-7	LF/UDP	Run	17,718	17,044	9,997,947	9,997,018	0	0	0	0	1
xcdx-8	LF/UDP	Run	17,718	17,044	9,997,947	9,997,516	0	0	0	0	1

Logged in to: 192.168.100.26:4002 as: Admin

Layer 3 Create/Modify Screen

+

-

All

Display

Sync

Batch-Create

Apply

OK

Cancel

1

Cross-Connect

CX Name: udp-se

CX Type: LANforge / UDP

Resource:

1 (brent-6port)

Port:

1 (eth0)

Min Tx Rate:

New Modem (56 Kbps)

Max Tx Rate:

Same

Min PDU Size:

AUTO

Max PDU Size:

Same

IP ToS:

Best Effort (0)

Pkts To Send:

Infinite

Endpoint A

Endpoint B

2

Cross-Connect

Report Timer: default (5 s)

Pld Pattern

increasing

Min IP Port:

AUTO

Max IP Port:

Same

Min Duration:

Forever

Max Duration:

Same

Min Reconn:

0 (0 ms)

Max Reconn:

Same

Multi-Conn:

Normal (0)

Script

Thresholds

Endpoint A

Endpoint B

3

Cross-Connect

Test Manager: default\_tm

Quiesce: 3 (3 sec)

IP Addr:

AUTO

Replay File

Loop

Dest Mac

Filename:

Dest MAC: <custom>

Endpoint A

Endpoint B

4

Endpoint A

Endpoint B

Snd Buff Size:

Rcv Buff Size:

Send Bad FCS:

Src MAC:

Use-Proxy

Proxy Addr:

Proxy Port:

Socket Priority:

Payload

Payload

5

Conn Timeout:

TCP MSS:

Endpoint A

Endpoint B

Do Checksum

UnManaged

Duration Quiesce

Quiesce-After-Range

TCP\_NODELAY

Concurrent IP Addrs

Clear-Port-On-Start

Linear-IP-Ports

Endp Name:

udp-se-A

udp-se-B

## Software Features

- Supports real-world protocols:
  - Layer 2: Raw-Ethernet.
  - 802.1Q VLANs.
  - PPPoE: Integrated PPPoE support.
  - Layer 3: IPv4, IPv6, UDP/IP, IGMP Multicast UDP, TCP/IP.
  - Layer 4: FTP, HTTP, HTTPS, TFTP, SFTP, SCP
  - 802.11a/b/g/n Wireless Station (up to 200 per machine).

7. 802.11a/b/g/n/ac 3x3 Wireless Stations (up to 128 per machine).
  8. Layer 4: TELNET, PING, DNS, SMTP, NMAP (via add-on script).
  9. File-IO: NFSv3, NFSv4, CIFS, iSCSI.
2. Supports up to 1000 concurrent TCP connections with base license package.
  3. The CT524-328-2ac-1n-1gf is able to push 900+Mbps through an AP, depending on the protocols mix, wireless mode and environment, and speed of the network under test. Supports at least 60 VoIP (SIP, RTP) calls if appropriate licenses are purchased. When all two ath10k a/b/g/n/ac and one ath9k a/b/g/n radios are configured on different channels, combined maximum upload speed exceeds 1Gbps. More powerful, and more portable systems, are also available.
  4. Supports real-world compliance with ARP protocol.
  5. Supports ToS (QoS) settings for TCP/IP and UDP/IP connections.
  6. Uses publicly available Linux and Windows network stacks for increased standards compliance.
  7. Utilizes [libcurl](#) for FTP, HTTP and HTTPS (SSL), TFTP and SCP protocols.
  8. Supports file system test endpoints (NFS, CIFS, and iSCSI file systems, too!). File system mounts can use the virtual interface feature for advanced testing of file server applications.
  9. Supports custom command-line programs, such as telnet, SMTP, and ping.
  10. Comprehensive traffic reports include: Packet Transmit Rate, Packet Receive Rate, Packet Drop %, Transmit Bytes, Receive Bytes, Latency, Jitter, various Ethernet driver level counters, and much more.
  11. Supports generation of reports that are ready to be imported into your favorite spread-sheet.
  12. Allows packet sniffing and network protocol decoding with the integrated [Wireshark](#) protocol sniffer.
  13. GUI runs as Java application on Linux, MAC and Microsoft Operating Systems (among others).
  14. GUI can run remotely, even over low-bandwidth links to accommodate the needs of the users.
  15. Central management application can manage multiple units, tests, and testers simultaneously.
  16. Includes easy built-in scripting for iterating through rates and packet sizes, with automated reporting. Also supports scriptable command line interface (telnet) which can be used to automate test scenarios. Perl libraries and example scripts are provided!
  17. Automatic discovery of LANforge data generators simplifies configuration of LANforge test equipment.
  18. LANforge traffic generation/management software is supported on Linux and MS Windows.



## **Hardware Specification**

1. High-End Portable system with quiet fans..
2. Operating System: Fedora Linux with customized 64-bit Linux kernel.
3. Two 1Gbps Ethernet ports, room for four wifi NICs, 2/4 port 1G or 10G Ethernet
4. Two Atheros/Qualcomm 802.11a/b/g/n/ac and one Atheros/Qualcomm 802.11a/b/g/n 3x3 MIMO NIC with three external antenna each. Supports up to 328 virtual stations (200 per a/b/g/n radio and 64 per a/b/g/n/ac radio).
5. Antenna-to-Radio association: See labels on chassis.
6. 2-port 1-Gbps fiber (short-range) Ethernet NIC included.
7. 802.11AC NIC supports up to 3x3 MCS-10 (1300Mbps encoding rate)
8. 802.11a/b/g/n NIC supports up to 3x3 MCS-23 (450Mbps encoding rate)
9. Intel E3-1245v5 3.5GHz processor.
10. DB9 Serial console (115200 8 N 1) for console management & initial configuration.
11. VGA, USB ports for desktop usage.
12. 16 GB RAM.
13. 40+ GB Solid State Hard Drive.
14. Larger storage drives available.
15. Internal power-supply.
16. Weight: 12 lbs
17. Dimensions: 15 x 13.25 x 4 inches    Metric: 381 x 337 x 102 mm.
18. AC Power supply: 100-240v
19. Operating Temperature: -20 ~ 55°C.
20. Certification: RoHS
21. Product launch: Q4, 2016. Supported through at least Q4 2020.

## Additional Feature Upgrades

Unless otherwise noted in the product description, these features usually cost extra:

- WanPaths (LANforge-ICE feature set)
- Virtual Interfaces: MAC-VLANs, 802.1Q VLANs, WiFi stations, etc
- FIRE Connections: Base FIRE license includes 1000 active connections.
- **WiFi RF Attenuator**: Adjust WiFi signal strength in a controllable manner.
- **RF Noise / Radar Simulator**: Simulate RADAR pulses and other RF noise.
- **SMA RF Cable Bundle**: Used to cable LANforge WiFIRE radios to device-under-test.
- LANforge-ICE Network Emulation.
- VOIP: Each concurrent call over the included package requires a license.
- Armageddon: Each pair of ports requires a license if not already included.
- External battery pack: 12+ hours for CT520, CT523, CT92X and other platforms.

---

*Candela Technologies Inc., 2417 Main Street, Suite 201, P.O. Box 3285, Ferndale, WA 98248, USA  
www.candelatech.com | sales@candelatech.com | +1 360 380 1618*

Last modified: Tue Nov 21 18:34:20 PST 2017